299 LIGHTING

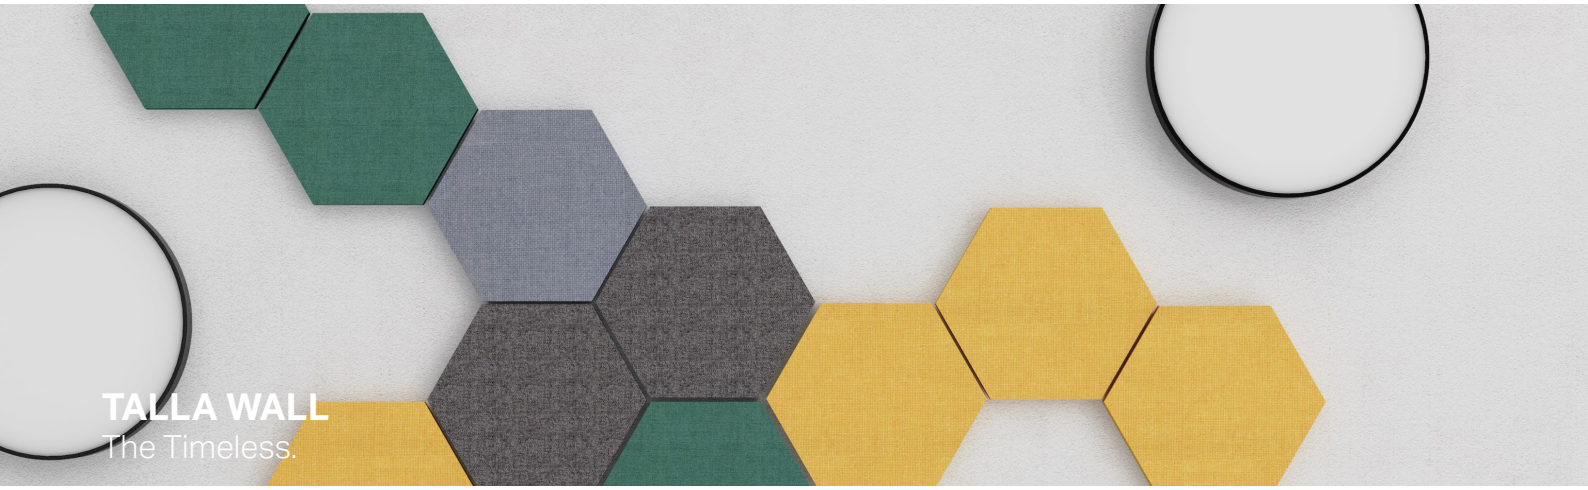


## PRODUCT DESCRIPTION

| | |
|---|---|
| **MOUNTING** | WALL |
| **LIGHT SOURCE** | LED |
| **LIGHT DISTRIBUTION** | DIRECT - DIRECT/INDIRECT |
| **MATERIALS** | ALUMINIUM |
| **OPTIC** | MICROPRISMATIC / OPAL |

The architectural office lighting Talla uses the idea of basic geometrical shapes and timeless appearance to produce a luminaire which delivers simplicity at its best. Variation in sizes, multiple colour choices and the selection of dimming options means the Talla can now add a personality to any space.

The option of an opal diffuser gives a clean and contemporary look, with the evenly distributed light enhancing the details of a building's architecture.

## PRODUCT CODE

### TALLA WALL DIRECT

| L (mm) | | | |
|---|---|---|---|
| 400x62mm | LED | 19W /2270lm | 21-J*1-F1-400-8**-*-*-* |
| 400x62mm | LED | 30W /3580lm | 21-J*1-F2-400-8**-*-*-* |
| 500x62mm | LED | 30W /3810lm | 21-J*1-F1-500-8**-*-*-* |
| 500x62mm | LED | 46W /5650lm | 21-J*1-F2-500-8**-*-*-* |
| 600x62mm | LED | 31W /4240lm | 21-J*1-F1-600-8**-*-*-* |
| 600x62mm | LED | 45W /5900lm | 21-J*1-F2-600-8**-*-*-* |
| 600x62mm | LED | 55W /7110lm | 21-J*1-F3-600-8**-*-*-* |
| 850x62mm | LED | 59W /8070lm | 21-J*1-F1-850-8**-*-*-* |
| 850x62mm | LED | 81W /10920lm | 21-J*1-F2-850-8**-*-*-* |
| 850x62mm | LED | 98W /13080lm | 21-J*1-F3-850-8**-*-*-* |

** Luminous Flux taken with 4000K / Opal Diffuser*

### TALLA WALL DIRECT / INDIRECT

| L (mm) | | | |
|---|---|---|---|
| 400x62mm | LED | 16W /2090lm | 21-J*3-F1-400-8**-*-*-* |
| 400x62mm | LED | 28W /3490lm | 21-J*3-F2-400-8**-*-*-* |
| 500x62mm | LED | 30W /3870lm | 21-J*3-F1-500-8**-*-*-* |
| 500x62mm | LED | 45W /5760lm | 21-J*3-F2-500-8**-*-*-* |
| 600x62mm | LED | 24W /3290lm | 21-J*3-F1-600-8**-*-*-* |
| 600x62mm | LED | 40W /5390lm | 21-J*3-F2-600-8**-*-*-* |
| 600x62mm | LED | 55W /7160lm | 21-J*3-F3-600-8**-*-*-* |
| 850x62mm | LED | 49W /6700lm | 21-J*3-F1-850-8**-*-*-* |
| 850x62mm | LED | 81W /10940lm | 21-J*3-F2-850-8**-*-*-* |
| 850x62mm | LED | 89W /11920lm | 21-J*3-F3-850-8**-*-*-* |

** Luminous Flux taken with 4000K / Opal Diffuser*

### OPTICS

| MICROPRISMATIC | OPAL | MICROPRISMATIC & OPAL |
|---|---|---|

| | |
|---|---|
| PRISMATIC | 21-JF*-F*-***-*8**-*-*-* |
| OPAL | 21-JH*-F*-***-*8**-*-*-* |
| PRISMATIC & OPAL | 21-JFH*-F*-***-*8**-*-*-* |

**Prismatic & Opal only on Indirect/Direct fittings*

### COLOUR TEMPERATURE

| 3000K | 4000K | TW 2700-6500K |
|---|---|---|

| | |
|---|---|
| 3000K | 21-J**-F*-***-830-*-* |
| 4000K | 21-J**-F*-***-840-*-* |
| TW | 21-J**-F*-***-8TW-J-*-* |

**TW not available with DALI Dimming*

### CONTROL

| NON DIM | DALI DIM |
|---|---|

| | |
|---|---|
| NON DIM | 21-J**-F*-***-8**-K-*-* |
| DALI DIM | 21-J**-F*-***-8**-J-*-* |

**PIR Sensor & other controls available on request*

### EMERGENCY

| NON EMERGENCY | 3HR NON-REPORTING EMERGENCY | 3HR REPORTING EMERGENCY | 3HR SELF-TEST EMERGENCY |
|---|---|---|---|

| | |
|---|---|
| NON-EMERGENCY | 21-J**-F*-***-8**-*-0-* |
| 3 HR NON-REPORTING | 21-J**-F*-***-8**-*-3-* |
| 3 HR REPORTING | 21-J**-F*-***-8**-*-4-* |
| 3 HR SELF-TEST | 21-J**-F*-***-8**-*-5-* |

### FINISH

| BLACK | WHITE | SILVER |
|---|---|---|

| | |
|---|---|
| BLACK | 21-J**-F*-***-8**-*-D |
| WHITE | 21-J**-F*-***-8**-*-C |
| SILVER | 21-J**-F*-***-8**-*-B |




Updated January 2025

info@299lighting.co.uk
www.299lighting.co.uk
+44 (0) 1179 422512
+44 (0) 2037 737530
2c Flowers Hill, Bristol BS4 5JJ
86 - 90 Paul Street, London, EC2A 4NE