
299 LIGHTING

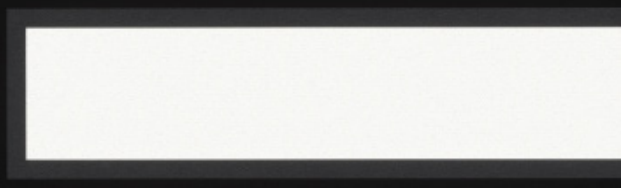

CLYDE RECESSED TRIM

Ready When You Are.

PRODUCT DESCRIPTION

MOUNTING	RECESSED
LIGHT SOURCE	LED
LIGHT DISTRIBUTION	DIRECT
MATERIALS	ALUMINIUM
LUMINAIRE TYPE	COMPLETE

The CLYDE is the ultimate comfort driven linear profile. Designed and manufactured in the UK, the CLYDE is the first Made in Britain certified luminaire in our product range. Thanks to its high build quality, excellent performance, and high visual comfort it is a perfect linear lighting for stimulating working environments and projects looking to use sustainable product options.


Used as an individual luminaire or a continuous linear lighting system, the CLYDE recessed trim with its 10 mm bezel adds a contemporary feel to any workplace or architectural spaces. Specified with the opal diffuser, the CLYDE recessed trim creates smooth lines of light in crisp plasterboard. It can also be used as part of acoustic ceiling features in the workplace. The clean-cut illuminated corner modules invite you to play and create unique shapes in made to measure lengths.


PRODUCT CODE

COMPLETE LUMINAIRE

L (mm)		
	Low Output	
584mm	LED 9.2W / 938 lm	83-A*1-F1-568-***-*-*-*
864mm	LED 13.8W / 1407 lm	83-A*1-F1-848-***-*-*-*
1144mm	LED 18.4W / 1876 lm	83-A*1-F1-1128-***-*-*-*
1424mm	LED 23.0W / 2345 lm	83-A*1-F1-1408-***-*-*-*
1704mm	LED 27.6W / 2814 lm	83-A*1-F1-1688-***-*-*-*
2264mm	LED 36.8W / 3752 lm	83-A*1-F1-2248-***-*-*-*
	Medium Output	
584mm	LED 11.9W / 1158 lm	83-A*1-F2-568-***-*-*-*
864mm	LED 17.9W / 1737 lm	83-A*1-F2-848-***-*-*-*
1144mm	LED 23.8W / 2315 lm	83-A*1-F2-1128-***-*-*-*
1424mm	LED 29.8W / 2894 lm	83-A*1-F2-1408-***-*-*-*
1704mm	LED 35.7W / 3473 lm	83-A*1-F2-1688-***-*-*-*
2264mm	LED 47.6W / 4631 lm	83-A*1-F2-2248-***-*-*-*
	High Output	
584mm	LED 14.4W / 1366 lm	83-A*1-F3-568-***-*-*-*
864mm	LED 21.6W / 2049 lm	83-A*1-F3-848-***-*-*-*
1144mm	LED 28.8W / 2731 lm	83-A*1-F3-1128-***-*-*-*
1424mm	LED 36.0W / 3414 lm	83-A*1-F3-1408-***-*-*-*
1704mm	LED 43.2W / 4097 lm	83-A*1-F3-1608-***-*-*-*
2264mm	LED 57.6W / 5463 lm	83-A*1-F3-2248-***-*-*-*

** Luminous Flux taken with 4000K / Opal Diffuser*





OPTICS

MICROPRISMATIC	OPAL	QUAD	PRISMATIC 83-AF1-F*-***-***-*-*-*
			OPAL 83-AH1-F*-***-***-*-*-*
			QUAD 83-AG1-F*-***-***-*-*-*

CRI

CRI 80	CRI 90	CRI 80 83-A*1-F*-***-8**-*-*-*
		CRI 90 83-A*1-F*-***-9**-*-*-*

COLOUR TEMPERATURE

3000K	4000K	TW 2700-6500K	3000K 83-A*1-F*-***-*30-*-*-*
			4000K 83-A*1-F*-***-*40-*-*-*
			TW 83-A*1-F*-***-*TW-*-*-*

CONTROL

NON DIM	DALI DIM
	NON DIM 83-A*1-F*-***-***-K-*-*
	DALI DIM 83-A*1-F*-***-***-J-*-*

**DALI-DIM as standard*

EMERGENCY

NO EMERGENCY	3 HOUR EMERGENCY
	0 HR 83-A*1-F*-***-***-*-0-*
	3 HR 83-A*1-F*-***-***-*-3-*

**Emergency available from 1144mm*

FINISH


WHITE	BLACK	SILVER
		WHITE 83-A*1-F*-***-***-*-*-C
		BLACK 83-A*1-F*-***-***-*-*-D
		SILVER 83-A*1-F*-***-***-*-*-B

LAST UPDATED JANUARY 2024

MADE IN BRITAIN

info@299lighting.co.uk
www.299lighting.co.uk
+44 (0) 1179 422512
+44 (0) 2037 737530
2c Flowers Hill, Brislington, Bristol, BS4 5JJ
86 - 90 Paul Street, London, EC2A 4NE

299 LIGHTING

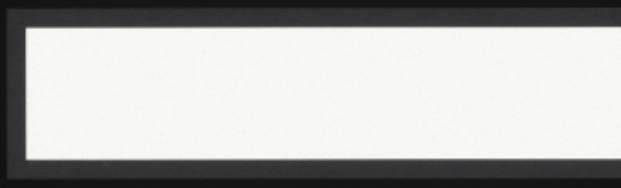

CLYDE RECESSED TRIM

Ready When You Are.

PRODUCT DESCRIPTION

MOUNTING	RECESSED
LIGHT SOURCE	LED
LIGHT DISTRIBUTION	DIRECT
MATERIALS	ALUMINIUM
LUMINAIRE TYPE	SYSTEM


The CLYDE is the ultimate comfort driven linear profile. Designed and manufactured in the UK, the CLYDE is the first Made in Britain certified luminaire in our product range. Thanks to its high build quality, excellent performance, and high visual comfort it is a perfect linear lighting for stimulating working environments and projects looking to use sustainable product options.

Used as an individual luminaire or a continuous linear lighting system, the CLYDE recessed trim with its 10 mm bezel adds a contemporary feel to any workplace or architectural spaces. Specified with the opal diffuser, the CLYDE recessed trim creates smooth lines of light in crisp plasterboard. It can also be used as part of acoustic ceiling features in the workplace. The clean-cut illuminated corner modules invite you to play and create unique shapes in made to measure lengths.

PRODUCT CODE

SYSTEM START / END MODULE


L (mm)		
	Low Output	
574mm	LED 9.2W / 938 lm	83-AA*1-F93-***-**-*
854mm	LED 13.8W / 1407 lm	83-AA*1-F14-***-**-*
1134mm	LED 18.4W / 1876 lm	83-AA*1-F18-***-**-*
1414mm	LED 23.0W / 2345 lm	83-AA*1-F23-***-**-*
1694mm	LED 27.6W / 2814 lm	83-AA*1-F28-***-**-*
2254mm	LED 36.8W / 3752 lm	83-AA*1-F37-***-**-*
	Medium Output	
574mm	LED 11.9W / 1158 lm	83-AA*1-F11-***-**-*
854mm	LED 17.9W / 1737 lm	83-AA*1-F17-***-**-*
1134mm	LED 23.8W / 2315 lm	83-AA*1-F24-***-**-*
1414mm	LED 29.8W / 2894 lm	83-AA*1-F29-***-**-*
1694mm	LED 35.7W / 3473 lm	83-AA*1-F34-***-**-*
2254mm	LED 47.6W / 4631 lm	83-AA*1-F46-***-**-*
	High Output	
574mm	LED 14.4W / 1366 lm	83-AA*1-F13-***-**-*
854mm	LED 21.6W / 2049 lm	83-AA*1-F20-***-**-*
1134mm	LED 28.8W / 2731 lm	83-AA*1-F27-***-**-*
1414mm	LED 36.0W / 3414 lm	83-AA*1-F35-***-**-*
1694mm	LED 43.2W / 4097 lm	83-AA*1-F41-***-**-*
2254mm	LED 57.6W / 5463 lm	83-AA*1-F54-***-**-*



SYSTEM CENTRAL MODULE

L (mm)		
	Low Output	
564mm	LED 9.2W / 938 lm	83-AB*1-F93-***-**-*
844mm	LED 13.8W / 1407 lm	83-AB*1-F14-***-**-*
1124mm	LED 18.4W / 1876 lm	83-AB*1-F18-***-**-*
1404mm	LED 23.0W / 2345 lm	83-AB*1-F23-***-**-*
1684mm	LED 27.6W / 2814 lm	83-AB*1-F28-***-**-*
2244mm	LED 36.8W / 3752 lm	83-AB*1-F37-***-**-*
	Medium Output	
564mm	LED 11.9W / 1158 lm	83-AB*1-F11-***-**-*
844mm	LED 17.9W / 1737 lm	83-AB*1-F17-***-**-*
1124mm	LED 23.8W / 2315 lm	83-AB*1-F24-***-**-*
1404mm	LED 29.8W / 2894 lm	83-AB*1-F29-***-**-*
1684mm	LED 35.7W / 3473 lm	83-AB*1-F34-***-**-*
2244mm	LED 47.6W / 4631 lm	83-AB*1-F46-***-**-*
	High Output	
564mm	LED 14.4W / 1366 lm	83-AB*1-F13-***-**-*
844mm	LED 21.6W / 2049 lm	83-AB*1-F20-***-**-*
1124mm	LED 28.8W / 2731 lm	83-AB*1-F27-***-**-*
1404mm	LED 36.0W / 3414 lm	83-AB*1-F35-***-**-*
1684mm	LED 43.2W / 4097 lm	83-AB*1-F41-***-**-*
2244mm	LED 57.6W / 5463 lm	83-AB*1-F54-***-**-*

** Luminous Flux taken with 4000K / Microprismatic Diffuser*



OPTICS

MICROPRISMATIC	OPAL	QUAD	PRISMATIC 83-A*F1-F**-***-**-*
			OPAL 83-A*H1-F**-***-**-*
			QUAD 83-A*G1-F**-***-**-*

CRI

CRI 80	CRI 90	CRI 80 83-A**1-F**-8**-**-*
		CRI 90 83-A**1-F**-9**-**-*

COLOUR TEMPERATURE

3000K	4000K	TW 2700-6500K	3000K 83-A**1-F**-*30-**-*
			4000K 83-A**1-F**-*40-**-*
			2700-6500K 83-A**1-F**-*TW-**-*

CONTROL

NON DIM	DALI DIM	NON DIM 83-A**1-F**-***-K*-*
		DALI DIM 83-A**1-F**-***-J*-*

**DALI-DIM as standard*

EMERGENCY

NO EMERGENCY	3 HOUR EMERGENCY	0 HR 83-A**1-F**-***-*0-*
		3 HR 83-A**1-F**-***-*3-*

**Emergency available from 1124mm*


FINISH

WHITE	BLACK	SILVER	WHITE 83-A**1-F**-***-**-C
			BLACK 83-A**1-F**-***-**-D
			SILVER 83-A**1-F**-***-**-B

MADE IN BRITAIN

info@299lighting.co.uk
www.299lighting.co.uk
+44 (0) 1179 422512
+44 (0) 2037 737530
Unit 2C Flowers Hill, Brislington, Bristol, BS4 5JJ
86 - 90 Paul Street, London, EC2A 4NE

299 LIGHTING

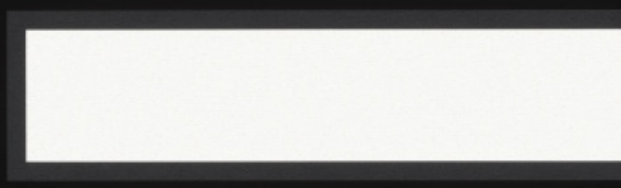

CLYDE RECESSED TRIM

Ready When You Are.

PRODUCT DESCRIPTION

MOUNTING	RECESSED
LIGHT SOURCE	LED
LIGHT DISTRIBUTION	DIRECT
MATERIALS	ALUMINIUM
LUMINAIRE TYPE	SHAPES


The CLYDE is the ultimate comfort driven linear profile. Designed and manufactured in the UK, the CLYDE is the first Made in Britain certified luminaire in our product range. Thanks to its high build quality, excellent performance, and high visual comfort it is a perfect linear lighting for stimulating working environments and projects looking to use sustainable product options.

Used as an individual luminaire or a continuous linear lighting system, the CLYDE recessed trim with its 10 mm bezel adds a contemporary feel to any workplace or architectural spaces. Specified with the opal diffuser, the CLYDE recessed trim creates smooth lines of light in crisp plasterboard. It can also be used as part of acoustic ceiling features in the workplace. The clean-cut illuminated corner modules invite you to play and create unique shapes in made to measure lengths.

PRODUCT CODE

COMPLETE 'T' LUMINAIRE

L (mm)		
	Low Output	
1140 x 608	LED 27.6W / 2814 lm	83-A*1-FTL-***-*0-*
	Medium Output	
1140 x 608	LED 35.7W / 3473 lm	83-A*1-FTM-***-*0-*
	High Output	
1140 x 608	LED 43.2W / 4097 lm	83-A*1-FTH-***-*0-*




COMPLETE 'L' LUMINAIRE

L (mm)		
	Low Output	
608 x 608	LED 18.4W / 1876 lm	83-A*1-FLL-***-*0-*
	Medium Output	
608 x 608	LED 23.8W / 2316 lm	83-A*1-FLM-***-*0-*
	High Output	
608 x 608	LED 28.8W / 2732 lm	83-A*1-FLH-***-*0-*




COMPLETE 'X' LUMINAIRE

L (mm)		
	Low Output	
1140 x 1140	LED 36.8W / 3752 lm	83-A*1-FXL-***-*0-*
	Medium Output	
1140 x 1140	LED 47.6W / 4630 lm	83-A*1-FXM-***-*0-*
	High Output	
1140 x 1140	LED 57.6W / 5462 lm	83-A*1-FXH-***-*0-*



SYSTEM 'T' LUMINAIRE

L (mm)		
	Low Output	
1140 x 608	LED 27.6W / 2814 lm	83-AB*1-FTL-***-*0-*
	Medium Output	
1140 x 608	LED 35.7W / 3473 lm	83-AB*1-FTM-***-*0-*
	High Output	
1140 x 608	LED 43.2W / 4097 lm	83-AB*1-FTH-***-*0-*




SYSTEM 'L' LUMINAIRE

L (mm)		
	Low Output	
608 x 608	LED 18.4W / 1876 lm	83-AB*1-FLL-***-*0-*
	Medium Output	
608 x 608	LED 23.8W / 2316 lm	83-AB*1-FLM-***-*0-*
	High Output	
608 x 608	LED 28.8W / 2732 lm	83-AB*1-FLH-***-*0-*



SYSTEM 'X' LUMINAIRE

L (mm)		
	Low Output	
1140 x 1140	LED 36.8W / 3752 lm	83-AB*1-FXL-***-*0-*
	Medium Output	
1140 x 1140	LED 47.6W / 4630 lm	83-AB*1-FXM-***-*0-*
	High Output	
1140 x 1140	LED 57.6W / 5462 lm	83-AB*1-FXH-***-*0-*



OPTICS

MICROPRISMATIC	OPAL	QUAD	PRISMATIC	83-AF1-F**-***-*0-* 83-ABF1-F**-***-*0-*
			OPAL	83-AH1-F**-***-*0-* 83-ABH1-F**-***-*0-*
			QUAD	83-AG1-F**-***-*0-* 83-ABG1-F**-***-*0-*

CRI

CRI 80	CRI 90	CRI 80	83-A*1-F**-8**-*0-* 83-AB*1-F**-8**-*0-*
		CRI 90	83-A*1-F**-9**-*0-* 83-AB*1-F**-9**-*0-*

COLOUR TEMPERATURE

3000K	4000K	TW 2700-6500K	3000K	83-A*1-F**-*30-*0-* 83-AB*1-F**-*30-*0-*
			4000K	83-A*1-F**-*40-*0-* 83-AB*1-F**-*40-*0-*
			2700-6500K	83-A*1-F**-*TW-*0-* 83-AB*1-F**-*TW-*0-*

CONTROL

NON DIM	DALI DIM	NON DIM	83-A*1-F**-***-K0-* 83-AB*1-F**-***-K0-*
		DALI DIM	83-A*1-F**-***-J0-* 83-AB*1-F**-***-J0-*

*DALI-DIM as standard

FINISH

WHITE	BLACK	SILVER	WHITE	83-A*1-F**-***-*0-C 83-AB*1-F**-***-*0-C
			BLACK	83-A*1-F**-***-*0-D 83-AB*1-F**-***-*0-D
			SILVER	83-A*1-F**-***-*0-B 83-AB*1-F**-***-*0-B

MADE IN BRITAIN

info@299lighting.co.uk
www.299lighting.co.uk
+44 (0) 1179 422512
+44 (0) 2037 737530
Unit 2C Flowers Hill, Brislington, Bristol, BS4 5JJ
86 - 90 Paul Street, London, EC2A 4NE