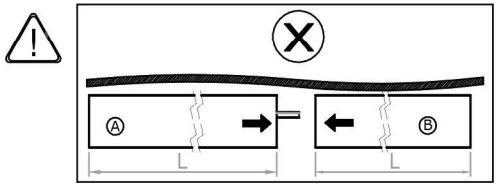

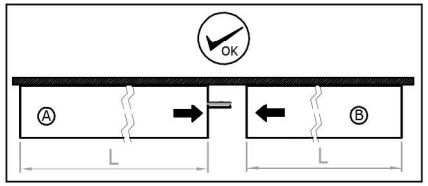







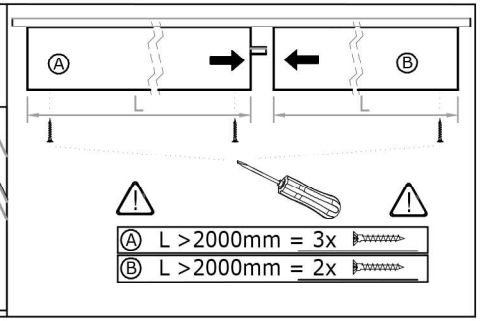













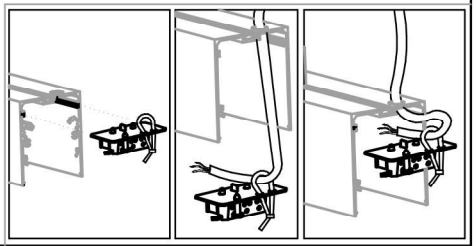

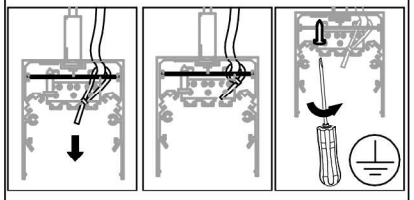

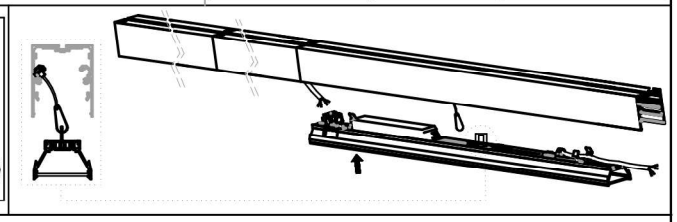

- The light source in this luminaire may be replaced only by the manufacturer or its contractual service technician or a similarly qualified person!
- The installation may only be carried by authorised specialist. Always switch-off the power supply before carrying out any maintenance.
- The manufacturer is not responsible for the incorrect use and assembly of its products.

299 LIGHTING

LOPEN SURFACE / SUSPENDED / WALL Installation Instructions

ta 25° IP 20



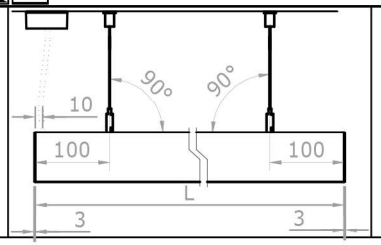

11-**1-F53/15/24-8**-*0-*	L = 561mm
11-**1-F79/22/37-8**-*0-*	L = 842mm
11-**1-F10/30/49-8**-*0-*	L = 1122mm
11-**1-F13/38/62-8**-*0-*	L = 1403mm
11-**1-F16/45/74-8**-*0-*	L = 1683mm
11-**1-F**/**/**-8**-*0-*	L = 1964mm
11-**1-F21/60/99-8**-*0-*	L = 2244mm
11-**1-F**/**/**-8**-*0-*	L = 3366mm
11-**1-F**/**/**-8**-*0-*	L = 4488mm























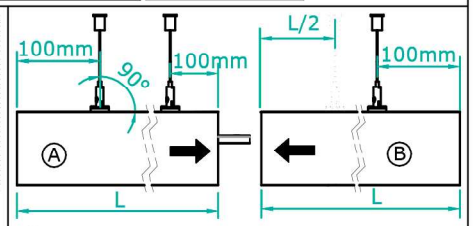

A L > 2000mm = 3+ Suspension required

B L > 2000mm = 2+ Suspension required















EMERGENCY LIGHTING WIRING

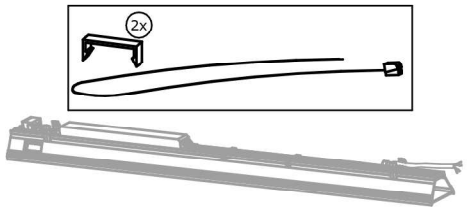

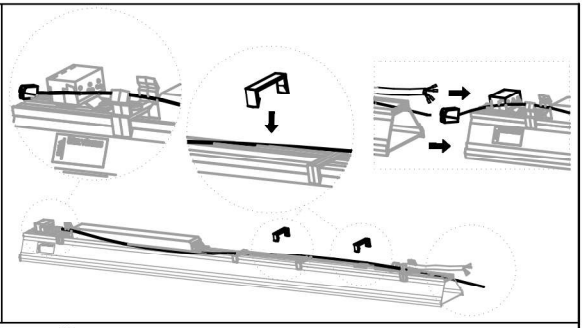

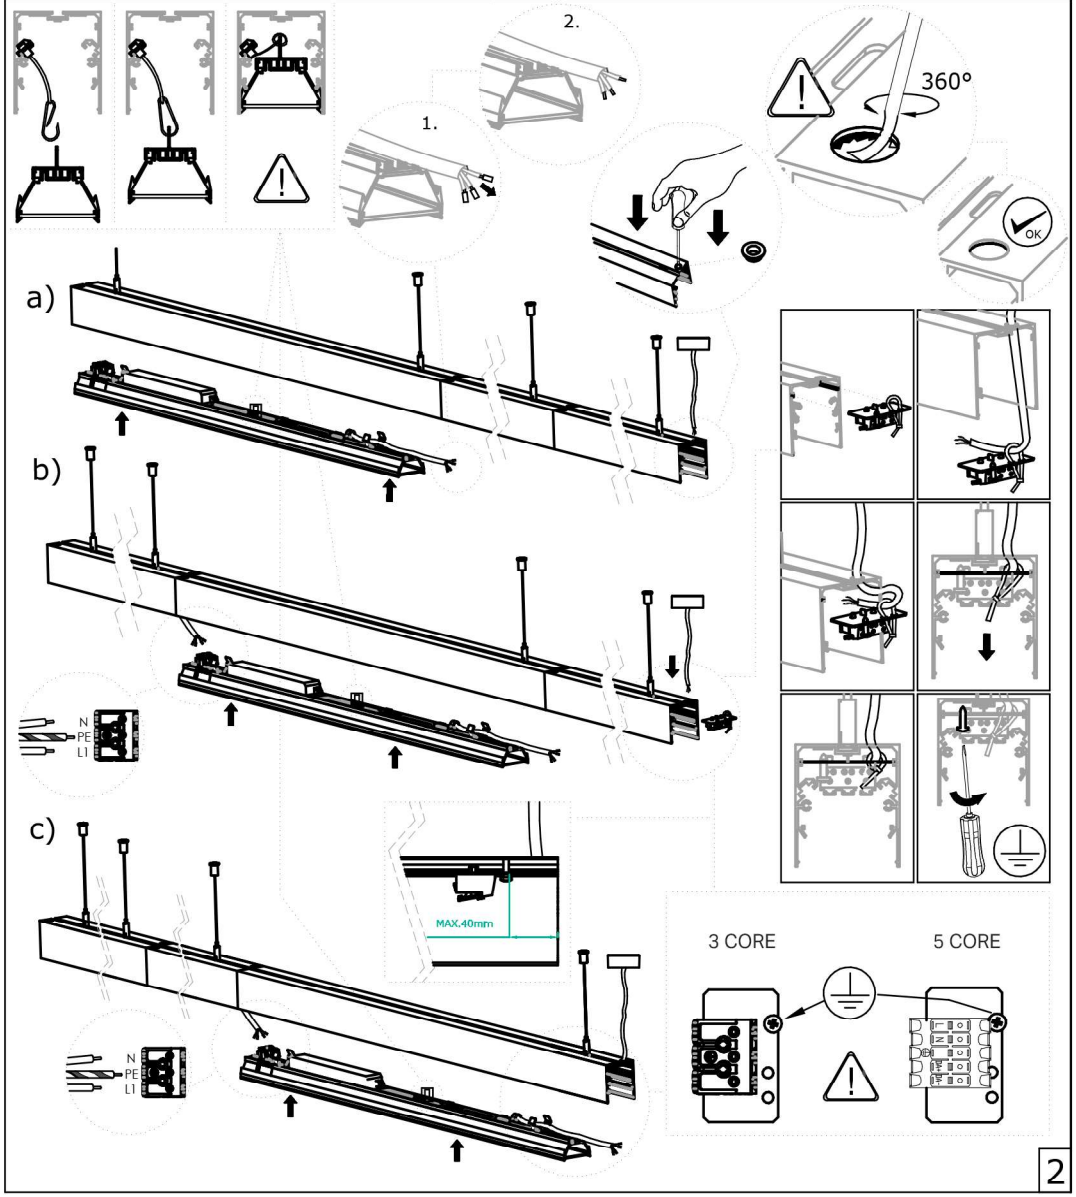

METAL END CAP

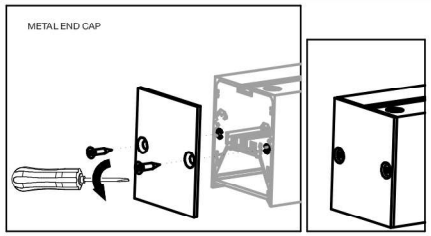

PLASTIC END CAP

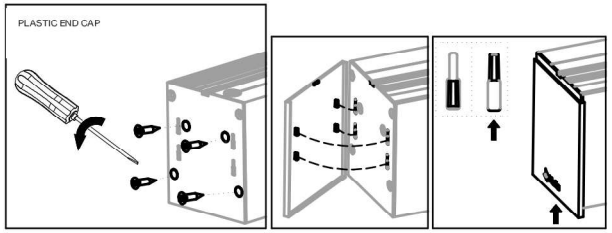

INSTALLATION BRACKET



- Luminaire must not be covered with insulating material !

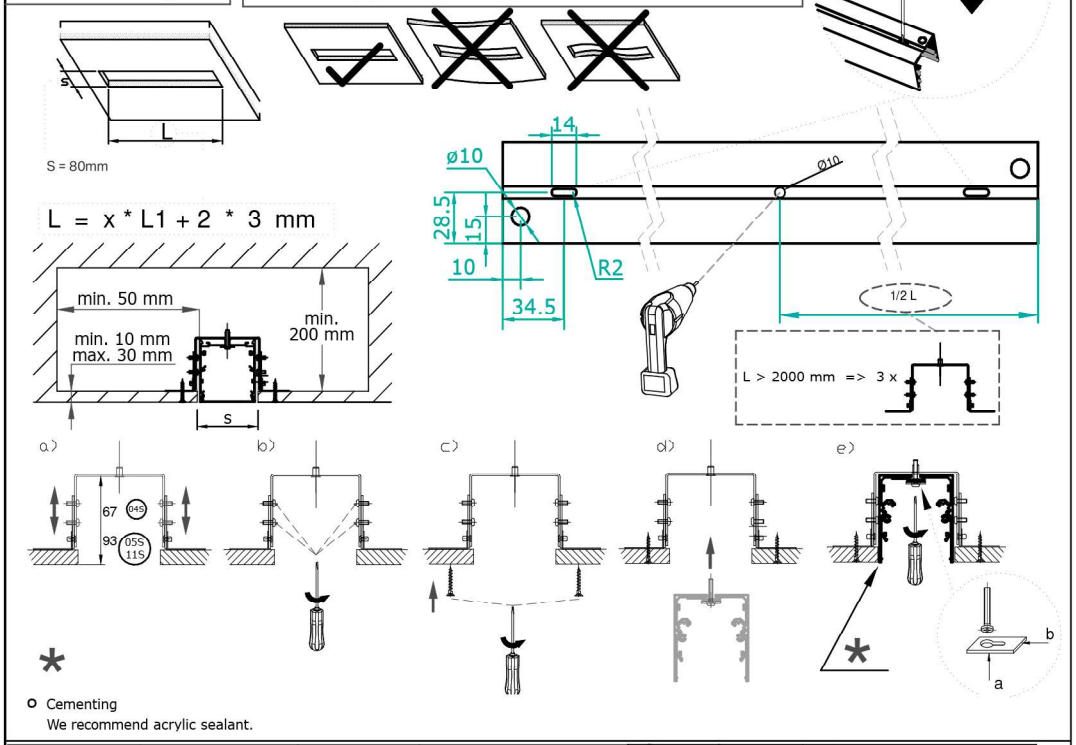

- Cementing
  We recommend acrylic sealant.

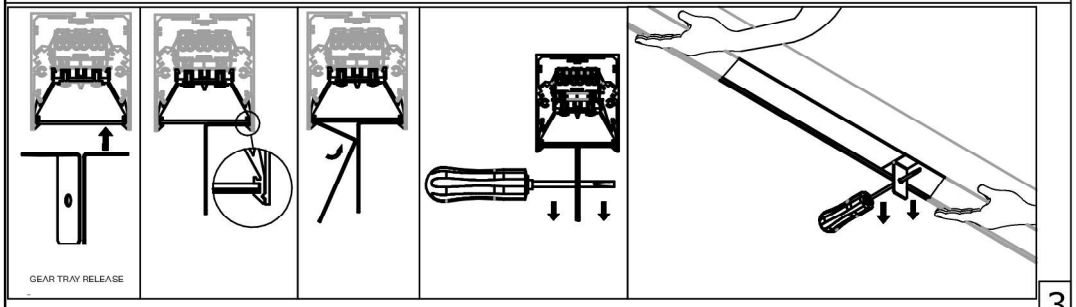

GEAR TRAY RELEASE